



The First in Synthetics®

PRODUCT CATALOG

The Leader in Automotive & Diesel Performance Products



Motor Oil



Diesel Oil



Motorcycle Oil



2-Stroke Oil



4-Stroke Oil



Racing Oil



European Oil



Hydraulic Oil



Compressor Oil



Fuel Additives



Transmission Fluid



Gear Lube



Grease



Filtration

Acetylated
SIGNATURE SERIES



AMSOIL Signature Series Synthetic Motor Oil represents the pinnacle of lubrication science. It is the result of 40 years of synthetic lubricant engineering. Signature Series brings not only industry-leading performance, but top value as well; its extended-drain performance delivers guaranteed protection for up to 25,000 miles/one year. AMSOIL Signature Series Synthetic Motor Oil offers a rare combination of performance, value and environmental responsibility.

Engineered to outperform conventional petroleum oils. Reduces friction, heat and wear for maximum power, performance and fuel efficiency. Resists high-temperature burn-off, chemical breakdown and sludging – keeps engines clean. Outstanding low-temperature fluidity for fast, dependable winter starts and immediate startup protection. Exceeds the most demanding worldwide performance standards and meets warranty requirements for all domestic and imported passenger car engines, both turbocharged and non-turbocharged. Up to 25,000-mile or one-year drain intervals.



A standard 3,000-mile oil change gets you **coast to coast**.
 The AMSOIL 25,000-mile oil change takes you **around the world**.

Signature Series 0W-20 Synthetic Motor Oil (ASM)

API Service SN (Resource Conserving), SM... • ILSAC GF-5, 4... • GM dexos1™

Signature Series 5W-20 Synthetic Motor Oil (ALM)

API Service SN (Resource Conserving), SM... • ILSAC GF-5, 4... • GM dexos1™

Signature Series 0W-30 Synthetic Motor Oil (AZO)


Recommended for applications requiring 0W-30, 5W-30 and 10W-30
 API Service SN (Resource Conserving), SM... • ILSAC GF-5, 4...

Signature Series 5W-30 Synthetic Motor Oil (ASL)

API Service SN (Resource Conserving), SM... • ILSAC GF-5, 4... • GM dexos1™

Signature Series 10W-30 Synthetic Motor Oil (ATM)

API Service SN (Resource Conserving), SM... • ILSAC GF-5, 4...

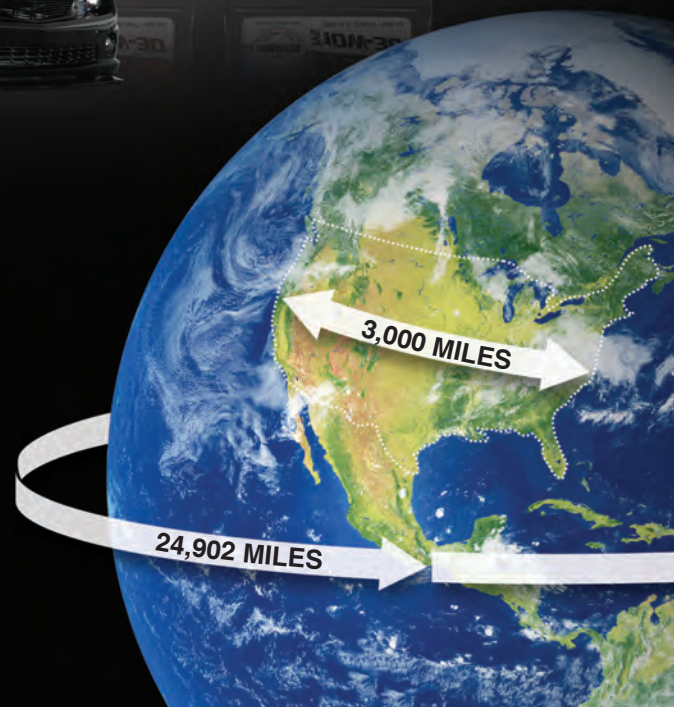

SYNTHETIC MOTOR OIL

XL

EXTENDED LIFE

Delivering extra engine protection and performance with the convenience of twice-per-year oil changes.



XL Synthetic Motor Oil

Formulated to last longer in service than conventional motor oils. Extended-drain boost technology maintains maximum wear protection for up to 10,000-mile/six-month drain intervals, or longer when recommended in owners' manuals or indicated by oil life monitoring systems. Save time, money and effort.

XL 0W-20 Synthetic Motor Oil (XLZ)

API Service SN, SM... • ILSAC GF-5, 4... • GM dexos1™

XL 5W-20 Synthetic Motor Oil (XLM)

API Service SN, SM... • ILSAC GF-5, 4... • GM dexos1™

XL 5W-30 Synthetic Motor Oil (XLF)

API Service SN, SM... • ILSAC GF-5, 4... • GM dexos1™

XL 10W-30 Synthetic Motor Oil (XLT)

API Service SN, SM... • ILSAC GF-5, 4...

XL 10W-40 Synthetic Motor Oil (XLO)

API Service SN, SM...

SYNTHETIC MOTOR OIL

OE

ORIGINAL EQUIPMENT

Delivering excellent engine protection and performance for vehicle manufacturer-recommended oil change intervals.



OE Synthetic Motor Oil

Specially formulated for the longer oil change intervals recommended by vehicle manufacturers today. Advanced synthetic technology resists chemical breakdown for maximum wear protection (and peace of mind) well beyond the traditional 3,000-mile oil change interval.

OE 0W-20 Synthetic Motor Oil (OEZ)

API Service SN, SM... • ILSAC GF-5, 4... • GM dexos1™

OE 5W-20 Synthetic Motor Oil (OEM)

API Service SN, SM... • ILSAC GF-5, 4... • GM dexos1™

OE 5W-30 Synthetic Motor Oil (OEF)

API Service SN, SM... • ILSAC GF-5, 4... • GM dexos1™

OE 10W-30 Synthetic Motor Oil (OET)

API Service SN, SM... • ILSAC GF-5, 4...

Tough-to-reach fill hole?

Order a flexible pour spout with your oil to make the job easier. Fits quarts and gallons.

STOCK#
G1230



BUILD IT.



Assembly Lube (EAL)

Formulated to cling to engine parts and provide exceptional wear protection while inhibiting rust and corrosion in newly built or rebuilt four-stroke engines. Designed to dissolve in oil, helping eliminate oil port clogging and deposit formation.

Break-In Oil (BRK)

SAE 30 viscosity-grade oil formulated without friction modifiers to allow for quick and efficient piston ring seating in new and rebuilt high-performance and racing engines. Contains anti-wear additives to protect cam lobes, lifters and rockers during the critical break-in period when wear rates are highest, while increased film strength protects rod and main bearings from damage.

CRUISE IT.



Z-ROD® Synthetic Motor Oil

High-zinc, high-phosphorus formulation engineered specifically for classic cars and performance vehicles. Provides extra protection for flat-tappet cams, lifters, rockers and other areas susceptible to wear. Unique blend of rust and corrosion inhibitors ensures maximum protection during long-term storage.

Z-ROD 10W-30 Synthetic Motor Oil (ZRT)

API SL, SJ...

Z-ROD 20W-50 Synthetic Motor Oil (ZRF)

API SL, SJ...

RACE IT.



DOMINATOR® Synthetic Racing Oil

Provides superior protection and performance for high-rpm, high-temperature racing and high-performance applications. Shear-stable formulation to protect critical engine components for the duration of the race. Effectively reduces friction for maximum power and cooler engine temperatures, resulting in improved lap times and longer-lasting equipment.

DOMINATOR 5W-20 Synthetic Racing Oil (RD20)

DOMINATOR 10W-30 Synthetic Racing Oil (RD30)

DOMINATOR 15W-50 Synthetic Racing Oil (RD50)

DOMINATOR SAE 60 Synthetic Racing Oil (RD60)

OFFICIAL OIL



PRODUCTS THE PROS USE

"It's not uncommon for us to see engine temps over 300°. There's no other oil I'd trust on race day."

Scott Douglas
11 World Championships



Premium Protection Synthetic Motor Oil

Formulated for use in gasoline engines and on- and off-road diesel engines not equipped with diesel particulate filters (DPFs). Offers excellent wear protection. Ideal for applications where the extra protection of a high-zinc formula is desired, including classic cars and motor homes. Excellent for flat-tappet, high-performance, heavy-duty and high-mileage applications.

Premium Protection 10W-40 Synthetic Motor Oil (AMO)

API Service SL, SJ, . . . , CF, CI-4+ • JASO MA (motorcycle wet clutch) • ISO-L-EMA

Premium Protection 20W-50 Synthetic Motor Oil (ARO)

API Service SL, SJ, . . . , CF, CI-4+ • JASO MA (motorcycle wet clutch) • ISO-L-EMA



PREMIUM PROTECTION FOR EUROPEAN VEHICLES

SAPS stands for sulfated ash, phosphorus and sulfur, which comprise a significant part of an engine oil's additive content. Because the vehicle emissions systems and aftertreatment devices of some European vehicles are sensitive to the SAPS content of oil, it is important to use an oil that meets the proper specification to ensure optimum engine protection and performance.



European Car Formula Synthetic Motor Oil

Specially formulated for the lubrication needs of European gasoline and diesel cars and light trucks. Blended with advanced AMSOIL synthetic base stocks, premium additives and broad viscosity ratings, allowing motorists to take advantage of the maximum extended drain intervals recommended by European automakers while providing outstanding protection and performance.

European Car Formula 5W-30 Synthetic Motor Oil (AEL) – Low-SAPS

VW 504.00/507.00 • MB 229.51 • BMW LL-04 • Porsche C30

European Car Formula 5W-40 Synthetic Motor Oil (AFL) – Mid-SAPS

ACEA C3 • API SN/SM... • BMW LL-04 • Chrysler MS-10850 (supersedes MS-10896) • GM dexos2™ • MB 229.51/229.31 • Porsche A40 • VW 502.00/505.01

European Car Formula 5W-40 Synthetic Motor Oil (EFM) – Full-SAPS

ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • MB 229.3/229.5 • Porsche A40 • Renault 0710, 0700 • VW 502.00/505.00

Designed for the specific demands of European gas and diesel engines.

- Outstanding All-Season Performance
- Engineered for Maximum Fuel Economy
- Enhanced Turbocharger Protection
- Low-, Mid- and Full-SAPS Formulations

DON'T PUT JUST ANY OIL IN YOUR BIKE. MAKE SURE IT'S OFFICIAL.



The First in Synthetics®



O F F I C I A L O I L



"There's a reason we chose
AMSOIL as our factory-fill."*

– Erik Buell

* The 2011 EBR 1190RS is factory-filled with
AMSOIL DOMINATOR® 15W-50 Synthetic Racing Oil.



Advanced Synthetic Motorcycle Oil

20W-50 Synthetic Motorcycle Oil (mcv)

API Service SG, SL/CF, CG-4 • JASO MA/MA2 (motorcycle wet clutch) • ISO-L-EMA2

Recommended for Harley-Davidson, Buell, KTM, Ducati, Aprilia, BMW, Triumph and other motorcycle engines. Superior synthetic formulation provides long service life and maximum protection against engine wear. Superior shear stability provides outstanding protection for high-performance engines, transmissions and primary chaincases. No friction modifiers. Wet-clutch compatible.

10W-40 Synthetic Motorcycle Oil (mcf)

API Service SG, SL/CF • JASO MA/MA2 (motorcycle wet clutch) • ISO-L-EMA2

Recommended for Honda, Yamaha, Kawasaki, Victory, BMW and other motorcycle engines. Superior synthetic formulation provides long service life and maximum protection against engine wear. Superior shear stability provides outstanding protection for high-performance engines and transmissions. No friction modifiers. Wet-clutch compatible.

10W-30 Synthetic Motorcycle Oil (mct)

API Service SG, SL/CF, CG-4 • JASO MA/MA2 (motorcycle wet clutch) • ISO-L-EMA2

Recommended for Honda, Yamaha, Suzuki and Kawasaki motorcycles and scooters, as well as Arctic Cat, Can-Am, Honda, Kawasaki and Suzuki ATVs and UTVs. Superior synthetic formulation provides long service life and maximum protection against engine wear. Superior shear stability delivers outstanding protection for high-performance engines and transmissions. No friction modifiers. Wet-clutch compatible.

SAE 60 Synthetic Motorcycle Oil (mcs)

API Service SG, SL/CF, GL-1 • JASO MA/MA2 (motorcycle wet clutch) • ISO-L-EMA2

Recommended for Harley-Davidson and big-bore motorcycles that require a 60-weight oil. Superior synthetic formulation provides long service life and maximum protection against engine wear. Superior shear stability provides outstanding protection for high-performance engines and transmissions. No friction modifiers. Wet-clutch compatible.

Briggs & Stratton Synthetic 4T Racing Oil (GBS2960)

Formulated by AMSOIL specifically for stock and modified small-displacement air-cooled racing engines used in kart, junior drag, quarter midget and other racing applications and recommended for any four-stroke air-cooled competition engine. Designed to help racers elicit the most horsepower and longest life from their engines. Resists the elevated heat common to high-performance racing engines. Reduces energy loss due to friction, while providing strong anti-wear properties. Resists foam. Protects against the formation of corrosion between races and during longer storage periods. Tested and validated by Briggs & Stratton and AMSOIL.

Formula 4-Stroke® Power Sports Synthetic Motor Oil (AFF)

Specially formulated to provide serious protection and performance in recreational four-stroke motors, including ATVs and snowmobiles. Broad 0W-40 viscosity rating provides superior protection in both hot and cold temperature extremes.

SAE 0W-40 • API Service SG, SJ, SL/CF • JASO MA/MA2 • ISO-L-EMA2

Formula 4-Stroke® Marine Synthetic Motor Oil

Formulated specifically for use in four-stroke gasoline-fueled engines used in marine applications. Offers outstanding wear protection and viscosity stability, low volatility and excellent low-temperature fluidity. Certified to meet NMMA FC-W performance specifications. Meets "Warranty Certified" status of engine manufacturers. Recommended for use in four-stroke outboard motors including Honda, Yamaha, Mercury, Suzuki, Johnson-Evinrude (BRP), Nissan and Tohatsu. Excellent for use in marine inboard/outboard (I/O) engines including Mercury (MerCruiser), OMC and Volvo-Penta. Also for use with marine inboard power plants including Crusader, Marine Power, GM, Ford and Chrysler. Recommended for use with personal watercraft (PWC) including Sea Doo (BRP), Honda, Yamaha and Kawasaki.

Formula 4-Stroke Marine 10W-30 Synthetic Motor Oil (wct)

API SL • NMMA FC-W (Registration #FB-30011B)

Formula 4-Stroke Marine 10W-40 Synthetic Motor Oil (wcf)

API SL • NMMA FC-W (Registration #FB-30012K)

Formula 4-Stroke® Synthetic Small Engine Oil (ASE)

Provides superior protection in the hot-temperature, severe-service operating conditions of both gasoline- and diesel-fueled small engines. Formulated with a high viscosity index and premium synthetic base oils that exceed both 10W-30 multi-grade and SAE 30 straight-grade viscosity requirements. Provides excellent all-season protection and performance. As a commercial-grade lubricant, it meets the demands of homeowner, commercial and industrial applications, improving productivity and reducing maintenance costs through superior engine protection.

Riding and Push Lawnmowers • Snowblowers • Generators • Pumps • Welders • Skid-Steers • Compressors • and more

API SL, SJ, SH, SG • API CF, CD • JASO MA/MA2 • ISO-L-EMA2

Formula 4-Stroke® Synthetic Scooter Oil (aso)

Formulated specifically to meet the special needs of today's high-tech air- and water-cooled four-stroke motorized scooters, offering advanced wear protection and friction reduction for longer equipment life and cooler operating temperatures. Its 10W-40 viscosity ensures consistent viscosity protection and provides additional protection for transmissions and gear boxes, while its friction-modifier-free formulation ensures wet-clutch compatibility and smooth clutch operation. A special anti-corrosion additive package provides long-term protection during periods of inactivity and storage.

API SG, SL/CF • JASO MA/MA2 • ISO-L-EMA2





HP Marine™ Synthetic 2-Stroke Oil (HPM)

Excellent for all two-stroke outboard motors, personal watercraft and anywhere NMMA TC-W3 and API-TC oils are specified. Recommended for Evinrude E-TEC factory-lean setting. Engineered with custom-designed synthetic base stocks to reduce friction and wear. Fortified with MAXDOSE™ system of advanced additives for “super-clean” operation. In severe-service field testing, completely prevented piston skirt scuffing, cylinder bore scuffing and ring sticking (visit www.amsoil.com/proof for details). Low smoke, low odor, low aquatic toxicity. Injector use or 50:1 premix.

TC-W3 / API TC

DOMINATOR® Synthetic 2-Stroke Racing Oil (TDR)

Complex formulation specially engineered to address the heat, pressure and friction of race-engineered two-cycle engines, both on and off the track. Purpose-built for outstanding film strength and lubricity. Anti-friction, anti-scuff formula for maximum power and exceptional piston protection.

API TC

Saber® 100:1 Pre-Mix Synthetic 2-Cycle Oil

Specifically designed for lean mix ratios in pre-mix applications. Saber Professional contains high-temperature detergents for small power equipment. Saber Outboard contains lower-temperature dispersants for water-cooled outboard motors. Recommended for 100:1 mix ratios in normal service (1.3 oz. per gallon).

Saber Professional 100:1 Pre-Mix Synthetic 2-Cycle Oil (ATP)

ISO-L-EGD / API TC / JASO FD

Saber Outboard 100:1 Pre-Mix Synthetic 2-Cycle Oil (ATO)

TC-W3 / API TC

INTERCEPTOR® Synthetic 2-Stroke Oil (AIT)

Engineered specifically for two-stroke snowmobiles, dirt bikes, ATVs and PWCs. Anti-scuff/anti-wear formulation provides excellent lubricity and cleanliness properties; in 50 hours of extreme engine dyno testing, INTERCEPTOR completely prevented piston skirt scuffing, ring sticking and exhaust power valve sticking (visit www.amsoil.com/proof for details). Low-smoke, low-odor formulation ensures riders are not “smoked out.” Injector use or 50:1 premix.

API TC

MAXIMUM RELIABILITY



Meets the performance requirements of Polaris®, Arctic Cat® and Ski-Doo® two-stroke snowmobiles.

MAXIMUM PERFORMANCE



ATP



ATO



EXHAUST SIDE



Piston coating largely intact.

The piston rings earned perfect 10 merit ratings, demonstrating no ring sticking and excellent performance.

The piston skirts exhibited 0.00% scuffing, proving INTERCEPTOR's outstanding friction-reduction capabilities.

Complete results at amsoil.com/proof

Severe-Duty Dyno Results

INTERCEPTOR® Synthetic 2-Stroke Oil was installed in a 2012 Ski-Doo® Renegade X snowmobile equipped with a Rotax® E-TEC® 800R engine. Following a 50-hour severe-duty dyno session designed to simulate a full season of real-world conditions, the engine was disassembled and rated for wear and deposits by a calibrated ASTM rater. Results prove INTERCEPTOR virtually eliminated wear and deposits throughout the entire engine.

OFFICIAL OIL



PRODUCTS THE PROS USE

“Ice oval racing is the most extreme test for a snowmobile engine, and DOMINATOR meets the challenge every time”.

P.J. Wanderscheid
4X AMSOIL Eagle River
World Champion





Synthetic 2-Stroke Injector Oil (AIO)

Offers the convenience of one formula for the tough conditions of all two-stroke recreational equipment requiring NMMA TC-W3 and API TC two-stroke oil. Effectively minimizes wear and deposits that can damage internal components and significantly shorten engine life. Provides cold-temperature fluidity for easy starts. Fortified with high-temperature detergent and dispersant additives to maintain engine cleanliness. Injector use or 50:1 pre-mix.

TC-W3 / API TC

Synthetic Chaincase & Gear Oil (TCC)

Provides superior protection and performance for enclosed chains. Ideal for snowmobiles, ATVs and general equipment. Extreme-pressure additives provide extra wear protection. Extends chain life, repels water and inhibits rust, oxidation and foam. Superior low-temperature starting, performance and protection. Includes convenient pour spout.



Shock Therapy® Suspension Fluid

Formulated for maximum stability and performance in high-performance fork and shock applications. Effectively controls friction and heat and significantly reduces wear and scuffing. Viscosity remains constant and foam and aeration are kept to a minimum, limiting shock fade and inconsistent dampening. Offers superior performance in temperature extremes.

Shock Therapy Suspension Fluid (STL)

Lightweight #5

AMSOIL STL #5 is recommended for applications that demand quick rebounds under extreme temperatures.

Shock Therapy Suspension Fluid (STM)

Medium #10

AMSOIL STM #10 is recommended for applications that require more dampening and slower rebounds.

Premium Synthetic Diesel Oil

The premium choice diesel oil for model-year 2007 and newer diesel engines requiring API CJ-4 emission quality oil standards. Also recommended for pre-2007 diesel engines. Incredibly shear-stable to withstand the stress of heat, soot and acids and help prevent deposits, wear and corrosion.

Broad viscosity range offers superior protection over a wide temperature range. Effectively reduces emissions by resisting oil consumption, while improving fuel efficiency. Recommended for up to three times the original equipment manufacturer's drain interval recommendation in diesel applications, not to exceed 50,000 miles/600 hours or one year, whichever comes first.* Recommended for up to two times the original equipment manufacturer's drain interval recommendation in gasoline applications, not to exceed 15,000 miles or one year, whichever comes first. Compatible with all exhaust treatment devices and vehicles equipped with turbochargers. Designed to extend the service life of particulate filters.

*Due to fuel dilution issues, extended drain intervals are not recommended for 2007-2009 Caterpillar C13 and C15 on-highway engines or 2007-present Dodge, Ford and GM LMM light-duty diesel pickups. See OE Synthetic Diesel Oil on page 10.



DELIVERING THE POWER OF SYNTHETICS

Wesley Beech
2013 Diesel Power
Challenge Winner



Premium 5W-40 Synthetic Diesel Oil (DEO)

API licensed CJ-4, CI-4+, CF, SN, SM • ACEA E7, E9 • Mack EO-O • DDC 93K218 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES 20081 • Volvo VDS-4, VDS-3 • MB 228.31 • MS 10902 • MTU Type I, II, 2.1 • MAN 3275, 3575 • JASO DH-2 • Global DHD-1 • Renault RLD-3

Premium 15W-40 Synthetic Diesel Oil (DME)

API CJ-4, CI-4+, CF, SM • ACEA E7, E9 • Mack EO-O • DDC 93K218 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES 20081 • Volvo VDS-4, VDS-3 • MB 228.31 • MS 10902 • MTU Type I, II, 2.1 • MAN 3275, 3575 • JASO DH-2 • Global DHD-1 • Renault RLD-3

OED



OEC



AME



OE Synthetic Diesel Oil

Provides excellent protection and performance in both on- and off-road diesel engines for the original equipment manufacturer's recommended drain interval. Suitable for both modern and older diesel applications requiring API CJ-4 specifications. Exceeds the higher performance demands of modern engines and withstands the stress of heat, soot and acids to help prevent deposits, wear and corrosion. Developed to address fuel dilution issues with 2007 to present Dodge, Ford and GM LMM light-duty diesel pickups.

OE 15W-40 Synthetic Diesel Oil (OED)

API CJ-4/CI-4+/CF/SN/SM • ACEA E9-08, E7-08 • DDC 93K218 • Cummins CES 20081 • MB 228.31 • CAT ECF-3, ECF-2, ECF-1-a • Mack EO-O • Volvo VDS-4, VDS-3 • MAN 3275, 3575 • Renault RLD-3 • MTU Type I, II, 2.1

OE 10W-30 Synthetic Diesel Oil (OEC)

API CJ-4/CI-4+/CF/SN/SM • ACEA E9-08, E7-08 • Cummins CES 20081 • MB 228.31 • CAT ECF-3, ECF-2, ECF-1-a • Mack EO-O • Volvo VDS-4, VDS-3 • MAN 3275, 3575 • Renault RLD-3 • MTU Type I, II, 2.1

Series 3000 5W-30 Synthetic Heavy Duty Diesel Oil (HDD)

Engineered for on- and off-road diesel engines not equipped with diesel particulate filters (DPF). Also for all gasoline engines recommending API SL specifications, including turbo-charged vehicles. Delivers better wear protection than other popular diesel oils and effectively reduces fuel consumption. Ideal for exhaust gas recirculation (EGR) engines. **Note:** For 2007 and newer on-road diesel vehicles, see Premium Synthetic Diesel Oil on pg. 9 and OE Synthetic Diesel Oil on pg. 10.

API CI-4+/CI-4/CH-4/CF/CF-2/SL/SJ • Global DHD-1 • ACEA A3/B3, E2, E3, E5, E7 • JASO DH-1 • Mack EO-M+, EO-N Premium Plus 2003 • DDC Power Guard, 93K214 • MAN 271/3275 • MTU Type II • Caterpillar ECF-1-a, ECF-2 • Cummins CES 20076, 20077, 20078 • Volvo VDS-3, VDS-2 • MB 228.1, 228.3, 229.1

15W-40 Synthetic Heavy Duty Diesel and Marine Oil (AME)

Engineered for on- and off-road diesel engines not equipped with diesel particulate filters (DPF). High 12 TBN controls acids from combustion blow-by and exhaust gas recirculation (EGR). High levels of detergency and dispersancy additives control soot thickening, oxidation and wear. Provides up to three times the original equipment manufacturer's drain interval recommendation in diesel applications, not to exceed 50,000 miles/600 hours or one year, whichever comes first. **Note:** For 2007 and newer on-road diesel vehicles, see Premium Synthetic Diesel Oil on pg. 9 and OE Synthetic Diesel Oil on pg. 10.

API CI-4+/CI-4/CH-4/CF/CF-2/SL/SJ • Global DHD-1 • ACEA A3/B3, E2, E3, E5, E7 • JASO DH-1 • Mack EO-M, EO-N • DDC 93K214 • Caterpillar ECF-1-a, ECF-2 • Cummins CES 20076, 20077, 20078 • Volvo VDS-3, VDS-2 • MB 228.1, 228.3, 229.1 • MAN 271, 3275 • MTU Type II

10W-30/SAE 30 Synthetic Heavy Duty Diesel Oil (ACD)

Exceeds both 10W-30 multi-grade and SAE 30 straight-grade viscosity requirements. Engineered for on- and off-road diesel engines not equipped with diesel particulate filters (DPF). Also recommended for gasoline engines requiring API SL or previous specifications. Excellent for heavy equipment and personal vehicles. Extends drain intervals. See the AMSOIL Product Information and Drain Interval Chart (G2281) for more information. **Note:** For 2007 and newer on-road diesel vehicles, see Premium Synthetic Diesels Oil on pg. 9 and OE Synthetic Diesel Oil on pg. 10.

API CI-4+/CH-4/CF-2/CF/SL • Global DHD-1 • ACEA A3/B3, E3, E5 • JASO DH-1 • Mack EO-M+, EO-N Premium Plus 2003 • DDC Power Guard, 93K214 • Caterpillar ECF-1-a, ECF-2 • Cummins CES 20076, 20077, 20078 • Volvo VDS-3, VDS-2 • MB 228.1, 228.3, 229.1 • MAN 271, 3275 • MTU Type II • Ford WSS-M2C921-A

HDD

ADVANCED
FUEL EFFICIENT FORMULA

ACD



Oil Analysis

AMSOIL and its subsidiary OIL ANALYZERS INC.® provide state-of-the-art oil analysis service, allowing customers to monitor engine condition and maximize oil drain intervals. Customers receive detailed analysis reports via fax, email and online reporting. Expert consultation of oil condition is easily accessible by phone (877-458-3315) or email (info@oaitesting.com). Coolant and diesel fuel analysis is also available. For more information, see www.oaitesting.com.

Oil Suction
Pump
(G1206)

Oil Analyzers

INC.



Signature Series Synthetic Automatic Transmission Fluid

Provides reserve protection in fleet vehicles, heavy-duty pickups, work trucks and other severe-service applications that quickly break down other lubricants, as well as top-of-the-line protection for passenger vehicles. Promotes maximum transmission performance and life by protecting against formation of harmful sludge in hot-running automatic transmissions. Retains viscosity in severe service to guard against wear to gears, clutch plates and other critical components. Outstanding cold-flow and frictional properties. Follow the vehicle manufacturer's normal-service drain interval in normal service or double the vehicle manufacturer's severe-service drain interval in severe service. Fuel-Efficient Synthetic Automatic Transmission Fluid is engineered to exceed the requirements of GM, Ford, Toyota and other OEMs where low-viscosity oil is required.

Handle More Heat With Confidence

Standard Severe Service

AMSOIL Severe Service

RESERVE PROTECTION

Change Interval—Miles

Signature Series Multi-Vehicle Synthetic Automatic Transmission Fluid (ATF)

Ford MERCON[®], MERCON[®] V, ESP-M2C166-H • GM DEXRON[®] III • Chrysler ATF+4[®], MOPAR[®] AS68RC • Allison C-4, TES-389 • Audi G 052 162, G 052 990, G 055 025 • BMW 7045E, LA 2634, LT 71141 • Honda ATF-Z1 (not CVT) • Hyundai SP-II and SP-III • Idemitsu K17 • JWS 3309, 3314, 3317 • Kia SP-II and SP-III, ATF Red-1 • MAN 339F, 339 V1, 339 V2, 339 Z1, Z2 & Z3 • Mazda ATF-M III, ATF-MV • Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81 • Mitsubishi SP-II and SP-III • Nissan Matic-D, Matic-J, Matic-K • Shell 3403, LA 2634 • Subaru ATF, ATF-HP • Suzuki 3314 & 3317 • Texaco ETL-7045E, ETL-8072B, N402 • Toyota Type T-III and T-IV • Voith 55.6335.XX (G607), 55.6336.XX (G1363) • Volvo 97340, 97341 • Volkswagen G 052 162, G 052 990, G 055 025 • ZF TE-ML 03D, 04D, 05L, 09, 11B, 14A, 14B, 14C, 16L, 17C

Note: Not for use with CVT or Ford Type F applications.

Signature Series Fuel-Efficient Synthetic Automatic Transmission Fluid (ATL)

Ford MERCON[®] LV, SP • GM DEXRON[®] VI • Audi G 055 005, G 055 162, G 060 162 • BMW 83 22 0 142 516, 83 22 2 152 426 • Honda DW-1[®] • Hyundai/Kia SP-IV • JWS 3324 • Mitsubishi SP-IV, ATF J2 • Nissan Matic-S • Saab 93 165 147 • Shell M-1375.4, M-1375.5, M-1375.6, M-L 12108 • Toyota WS • Volkswagen G 055 005, G 055 162, G 060 162

Note: Not for use with CVT applications.



OE Synthetic Automatic Transmission Fluid

Provides outstanding protection for passenger-car/light-truck transmissions throughout original equipment manufacturer (OEM)-recommended drain intervals. Resists wear to the transmission's valve body, gears, clutch plates and other vital parts. Guards against the harmful effects of thermal breakdown, resisting varnish formation that can stick valves and threaten transmission performance and life. Resists thickening and flows quickly for fast, reliable shifts during cold starts and maximum fuel efficiency. OE Fuel-Efficient Synthetic Automatic Transmission Fluid is engineered to exceed the requirements of GM, Ford, Toyota and other OEMs where low-viscosity oil is required.

OE Multi-Vehicle Synthetic Automatic Transmission Fluid (OTF)

Ford MERCON[®], MERCON[®] V, ESP-M2C166-H • GM DEXRON[®] III • Chrysler MOPAR[®] AS68RC • Allison C-4, TES-389 • Audi G 052 162, G 052 990, G 055 025 • BMW 7045E, LA 2634, LT 71141 • Honda ATF-Z1 (not CVT) • Hyundai SP-II and SP-III • Idemitsu K17 • JWS 3309, 3314, 3317 • Kia SP-II and SP-III, ATF Red-1 • MAN 339F, 339 V1, 339 V2, 339 Z1 & 339 Z2 • Mazda ATF-M III, ATF-MV • Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81 • Mitsubishi SP-II and SP-III • Nissan Matic-D, Matic-J, Matic-K • Shell 3403, LA 2634 • Subaru ATF, ATF-HP • Suzuki 3314 & 3317 • Texaco ETL-7045E, ETL-8072B, N402 • Toyota Type T-III and T-IV • Voith 55.6335.XX (G607), 55.6336.XX (G1363) • Volvo 97340, 97341 • Volkswagen G 052 162, G 052 990, G 055 025 • ZF TE-ML 03D, 04D, 05L, 09, 11B, 14A, 14B, 16L, 17C

Note: Not for use with CVT or Ford Type F applications. AMSOIL warrants the use of this product for Chrysler ATF+4[®] applications above -38°F. Product does not meet the cold temperature requirement of ATF+4 at -40°F. For warranty information, visit www.amsoil.com/warranty.aspx.

OE Fuel-Efficient Synthetic Automatic Transmission Fluid (OTL)

Ford MERCON[®] LV • GM DEXRON[®] VI • Aisin-Warner AW-1 • Audi G 055 005, G 055 162, G 060 162 • BMW 83 22 0 142 516, 83 22 2 152 426 • Honda DW-1[®] • Hyundai/Kia SP-IV • JWS 3324 • Mitsubishi SP-IV, ATF J2 • Nissan Matic-S • Saab 93 165 147 • Shell M-1375.4, M-1375.5, M-1375.6, M-L 12108 • Toyota WS • Volkswagen G 055 005, G 055 162, G 060 162

Note: Not for use with CVT applications.

Synthetic Manual Transmission and Transaxle Gear Lube (MTG)

Designed to meet the special requirements of certain manual transmissions and transaxles. Provides improved internal component protection. Formulated with extreme-pressure additives and advanced frictional qualities that provide smooth shifts while protecting gears, bearings and seals. Non-corrosive to yellow metals. Recommended for manual transmissions and transaxles that require 75W-85, 75W-90 or 80W-90 viscosities.

75W-90 • API GL-4



Synthetic Synchronmesh Transmission Fluid (MTF)

Specifically designed for manual transmissions and transaxles with synchronmesh systems that require light viscosity, non-extreme-pressure fortified oil. Formulated with advanced additive technology to provide proper friction characteristics for smooth shifting without grinding or bump shifting while providing the ultimate in gear and bearing protection. Outperforms motor oils in manual transmissions and provides excellent performance in extreme temperatures from -40° F to 300° F. Possesses outstanding anti-wear and anti-foam properties and is non-corrosive to yellow metals. Recommended for use in manual transmissions and transaxles. Not for use in engines, wet clutches or clutch-type limited-slip differential applications.



ART

Super Shift® Racing Transmission Fluid (ART)

Specially formulated for high-horsepower, high-torque conditions. Designed to provide quick, solid shifts and prevent automatic transmissions from slipping, helping racers improve on elapsed times. Delivers exceptional friction reduction and reduced wear so clutch plates and transmissions last longer. Provides maximum torque transfer and brake power while resisting oxidation and thermal breakdown.

Allison C-4 • Ford Type F



ATD

Torque-Drive® Synthetic Automatic Transmission Fluid (ATD)

Engineered to eliminate the deficiencies common to conventional petroleum ATF's, AMSOIL Torque-Drive provides superior performance and protection against thermal and oxidative degradation, sludge and varnish formation and viscosity shear down. Ideal for Allison Transmissions and heavy equipment.

Recommended for use in applications specifying Allison® TES-295, TES-389 or C-4, Caterpillar TO-2, Dexron® III, Mercon®, TE-ML 14C, Voith 55.6336.XX (Voith G-1363)



ATH

Synthetic Tractor/Hydraulic Transmission Oil (ATH)

Formulated for combinations of transmissions, hydraulic systems, final drives, power take-off systems and wet brakes, including hydrostatic lawn mower transmissions. Exceeds the most demanding all-weather specifications of both Ford New Holland FNHA-2-C-200 & 2-C-201 and John Deere J20C & J20D, as well as most other tractor hydraulic/ transmissions, eliminating the need for seasonal oil changes.

SAE 50 Long-Life Synthetic Transmission Oil (FTF)

Specially formulated to meet the demanding requirements of manual transmissions found in high-torque, heavy-duty line-haul trucks and other commercial applications. Its synthetic base stock and premium additives help reduce gear and bearing wear, improve shifting and extend transmission life throughout drain intervals of up to 500,000 miles/five years.

Eaton PS-164 Rev. 7 • API GL-1 and MT-1 • Navistar/International TMS 6816 • Mack TO-A Plus • ZF Freedomline • Meritor 0-81 • Rockwell/Eaton/Fuller CD-50 (PS-081)



CTJ

Synthetic Powershift Transmission Fluid

Specifically formulated for heavy-duty powershift transmissions. Provides outstanding friction performance for enhanced clutch engagement. Formulated to prevent slippage and glazing. Shear-stable and anti-wear fortified. Protects gears and bearings. Resists high-temperature oxidation, varnish and sludge formation. Superb cold-flow properties. Extended drain interval capable. Recommended for heavy-duty service found in commercial and earth-moving applications as well as lighter-duty transmissions requiring the listed specifications. SAE 30 & 50 are also excellent for manual transmissions.

Synthetic Powershift Transmission Fluid (CTG)

SAE 10W • CAT TO-4 • Allison C-4 • Komatsu KES 07.868.1 • API GL-1

Synthetic Powershift Transmission Fluid (CTJ)

SAE 30 • CAT TO-4 • Allison C-4 • Komatsu KES 07.868.1 • API GL-1

Synthetic Powershift Transmission Fluid (CTL)

SAE 50 • CAT TO-4 • CD-50 • Komatsu KES 07.868.1 • API GL-1



CTL

Severe Gear® Synthetic EP Gear Lube

Specifically engineered for high-demand applications, including trailer towing, heavy hauling, 4x4 off-road driving, commercial use and racing. Superior lube film strength combined with extra additives protects gears and bearings from scoring and wear. Resists high heat and possesses excellent cold-flow properties. Outperforms conventional gear oils. Recommended for all types of vehicles such as turbo-diesel pickups, SUVs, autos, trucks, heavy equipment and motor homes. Compatible with most limited-slip differentials.

Severe Gear 75W-90 Synthetic Gear Lube (svg)

Top fuel efficiency and cold-temperature performance

API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

Severe Gear 75W-110 Synthetic Gear Lube (svt)

Extra viscosity protection without sacrificing fuel efficiency

API GL-5/MT-1 • MIL-PRF-2105E • Mack GO-J • Dana SHAES 234 (Eaton PS-037)

Severe Gear 75W-140 Synthetic Gear Lube (svo)

Maximum viscosity protection for severe-duty applications

API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)




SVG

SVT

SVO



Gear Lube Hand Pump (G2039)



Flexible Pour Spout (G1230)

Nozzle Dispenser Caps (6) (G1242)

OFFICIAL OIL



Severe Gear® EP Synthetic Racing Gear Lube

High-viscosity, extreme-pressure gear lube engineered for the demands of severe racing conditions, including off-road truck racing, rock crawling, tractor pulling, funny car racing and dragster racing. Protects gears from shock-loading and tire shake. Resists sling-off from G-forces and high speeds. Effectively clings to gears, promoting cooler operating temperatures and extending gear and bearing life.

Severe Gear SAE 190 Synthetic Gear Lube (SRN)

API GL-5/MT-1

Severe Gear SAE 250 Synthetic Gear Lube (SRT)

API GL-5/MT-1

Long Life Synthetic Gear Lube

Specifically engineered for extended drain intervals up to 500,000 miles as set by equipment manufacturers for over-the-road trucks. Protects against wear and improves equipment life. Excellent all-season summer and winter performance. Outperforms all conventional gear oils. Also excellent for passenger cars and trucks. Compatible with most limited-slip differentials.

75W-90 Long Life Synthetic Gear Lube (FGR)

API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J+ • Dana SHAES 256 (Eaton PS-163)

80W-140 Long Life Synthetic Gear Lube (FGO)

API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J+ • Dana SHAES 256 (Eaton PS-163)



80W-90 Synthetic Gear Lube (AGL)

High-quality replacement for applications specifying SAE 80W-90 conventional gear lube. Synthetic construction provides improved cold-flow properties, high viscosity index, superior heat resistance and excellent wear protection.

API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)



Universal Synthetic Marine Gear Lube (AGM)

Provides true marine gear performance, resists foaming and retains extreme-pressure qualities even when subjected to 10 percent water contamination. For use in outboard lower units, sterndrives, V-drives, bow and tunnel thrusters and marine transmissions requiring an SAE 75W-90 or 80W-90 meeting either GL-4 or GL-5 performance standards.

GL-5, GL-4



OUTSTANDING PROTECTION FOR LOWER UNITS

Slip Lock® Differential Additive (ADA)

Formulated to eliminate gear-housing chatter in cars, trucks and SUVs equipped with limited-slip, positraction and locking differentials. Reduces banging and clunking associated with automatic locking differentials. Formulated for use with both synthetic and petroleum gear lubricants and safely replaces manufacturer-recommended friction modifiers. One tube treats differential capacities of two to four quarts.

Note: AMSOIL synthetic gear lubes do not require the use of this additive. However, not all differentials respond the same and if chatter is noticed, the addition of AMSOIL Slip Lock will eliminate it.



EaO/Ea15K



Ea® Oil Filters (EaO/Ea15K)

AMSOIL Ea Oil Filters rank among the highest efficiency filters available to the auto/light-truck market, providing a filtering efficiency of 98.7 percent at 20 microns. Featuring advanced full-synthetic technology, Ea Oil Filters provide greater efficiency, capacity and durability than cellulose filters, extending engine and filter life and reducing engine wear. When used in conjunction with AMSOIL synthetic motor oil, AMSOIL Ea Oil Filters are guaranteed for extended service life:

- Ea Filters designated with product code Ea15K are recommended for 15,000 miles/one year, whichever comes first, in normal or severe service.
- Ea Filters designated with product code EaO are recommended for 25,000 miles/one year, whichever comes first, in normal service or 15,000 miles/one year, whichever comes first, in severe service.

Which filter do I need?

Call 1-800-956-5695 (Monday-Friday, 7 a.m. - 5 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine the appropriate filter for each application. When AMSOIL Ea Oil Filters are used with a motor oil other than AMSOIL motor oil the filter should be changed according to the vehicle manufacturer recommendation.

EaA



Ea® Air Filters (EaA)

AMSOIL Ea Air Filters incorporate nanofiber technology which has been used exclusively in severe and heavy-duty applications. AMSOIL Ea Filters are more efficient and have greater capacity than cellulose and wet-gauze filters, effectively extending engine and filter life and reducing engine wear. Cleaning of Ea Filters with a shop vacuum or low-pressure shop air is recommended every 25,000 miles or one year, and they have a total service life of 100,000 miles or four years.

More Premium Ea® Filters

AMSOIL offers a variety of specialty Ea oil and air filters constructed with premium synthetic technology. Call 1-715-399-8324 (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for Ea Heavy-Duty Extended-Life Oil Filters, Ea By-Pass, Ea Universal Air Induction, Ea Racing and Ea Pre-Filter application information. Call 1-800-956-5695 (Monday-Friday, 7 a.m. - 5 p.m. Central Time) for motorcycle filter application information.

Ea Heavy-Duty Extended-Life Oil Filters (EaHD)



Provide excellent filtering efficiency and high contaminant capacity for heavy-duty on- and off-road diesel and gasoline applications. Provide extended service intervals that coincide with the maximum drain intervals of AMSOIL synthetic motor oils.

EaBP By-Pass Filters (EaBP)



High-efficiency by-pass filters effectively remove minute dirt particles and soot. Provides an efficiency rating of 98.7 percent at two microns and filters all the oil in a typical five-quart sump in less than 10 minutes at normal operating RPM.

Some mechanical ability required for installation.

Dual-Remote Oil Filtration Kit (BMK23)



Versatile system combines full-flow and by-pass oil filtration on a single, easy-to-install mount. All installation parts are included.

Dual Gard® Oil Filtration Mount (BMK22)



Links two AMSOIL By-Pass Filter elements together for engines with sump capacities over 20 quarts. Allows fast and simple servicing with spin-on elements.

Marine Dual-Remote Oil Filtration Kit (BMK18)



High-efficiency oil filtration system for marine applications combines full-flow and by-pass oil filters on an easily accessible remote mount. Adapter kits allow system to be used with a wide variety of marine engines.



Heavy-Duty By-Pass System (BMK30)

Maximum filtration performance for virtually all heavy-duty diesel applications, including Class 6, 7 and 8 heavy-duty trucks, off-road equipment, buses, generators, marine engines, logging and agricultural equipment.

EaAU



Ea Universal Air Induction Filters (EaAU)

Fit most popular air intake systems on the market, providing improved cold air intake and excellent efficiency for superior engine protection and performance. Cleanable and remain serviceable for long filter life.




Ea Racing Air Filters (EaAR)

Specially designed for carbureted racing and street rod applications, providing higher dirt-holding capacity, lower pressure drop and greater airflow and efficiency. Cleanable and remain serviceable for long filter life.



Ea Pre-Filters (EaPF)

Constructed of woven mesh and designed to fit over the top of Ea Racing and Air Induction Filters, preventing large particles from sticking to them and blocking airflow. Easily removed and shaken free of debris in seconds. Cleanable and remain serviceable for up to one year.



Ea Motorcycle Oil Filters (EaOM)

Designed for motorcycles, ATVs and four-stroke personal watercraft, snowmobiles and outboard motors, stopping smaller dirt particles, offering less restriction, extending equipment and filter life and improving performance. Fluted for easy removal. Available in black or chrome.



DOMINATOR® Synthetic Racing Grease (GRG)

Ultimate protection for high-speed, high-temperature, extreme-pressure applications. Maximizes power, bearing efficiency and fuel efficiency, while delivering superior wear protection and friction reduction for wheel bearings and chassis components in racing vehicles operated on snow, dirt, water or pavement.

NLGI No. 2, GC/LB

GRG



Synthetic Polymeric Off-Road Grease

Formulated to resist impact/pound-out and provide outstanding protection and performance in the extreme environments faced in heavy-duty off-road equipment. Provides exceptional adhesion and cohesion properties, resists water washout and stays in place longer, providing outstanding lubrication over extended service intervals, reducing maintenance costs and extending equipment life.

Synthetic Polymeric Off-Road Grease (GPOR1)

NLGI No. 1

Synthetic Polymeric Off-Road Grease (GPOR2)

NLGI No. 2

Synthetic Polymeric Truck, Chassis and Equipment Grease

Delivers excellent wear protection and performance in the severe-service, extreme-pressure environments faced in medium- and heavy-duty over-the-road trucks and equipment. Clings tenaciously to metal surfaces, staying in place to seal out water and contaminants and provide a protective barrier between metal components. Extended service life reduces the need for frequent re-application (or requires less grease at each servicing), reducing maintenance costs and increasing equipment life.

Synthetic Polymeric Truck, Chassis and Equipment Grease (GPTR1)

NLGI No. 1

Synthetic Polymeric Truck, Chassis and Equipment Grease (GPTR2)

NLGI No. 2



Synthetic Multi-Purpose Grease (GLC)

Reduces friction and wear in high-speed/high-temperature components such as automotive wheel bearings and electric motors. Keeps components running clean and trouble-free for outstanding performance and long life.

NLGI No. 2, GC/LB

Synthetic Water Resistant Grease (GWR)

Resists water washout and corrosion. Maximum protection for boat trailer wheel bearings, outboard motors, ATVs, UTVs and other components frequently exposed to water.

NLGI No. 2, GC/LB



X-Treme Synthetic Food Grade Grease (GXC)

An ultra-premium lubricant designed for high levels of protection in food and pharmaceutical industry equipment. NSF-approved (formerly USDA H-1) for incidental contact with food. Excellent high-temperature and extreme-pressure protection.

NLGI No. 2

Synthetic Fifth-Wheel Grease (FWG)

Delivers long service life and outstanding protection against wear and corrosion in the heavily-loaded, harsh operating environments specific to fifth-wheel hitches used in trucking and trailer applications.

NLGI No. 2



GXC



GSF



Spray Grease (GSP)

Effectively reduces friction and wear, keeping components running clean and trouble-free for outstanding performance and long life. Applies quickly and evenly and is ideal for greasing hard-to-reach equipment, including hinges, springs and other common applications.

GSP



Semi-Fluid 00 Synthetic EP Grease (GSF)

Formulated with high-viscosity ISO-460 synthetic base oil and a sophisticated additive package, providing unparalleled protection against wear. Ideal for leaky gear boxes in industrial and fleet applications, centralized lubrication systems and for use in applications that are difficult to service. Primarily used in grease-filled cases where conventional semifluid greases do not provide adequate lubricant life or protection. Replaces Mobil SHC 007.

NLGI #00

Synthetic High Viscosity Lithium Complex Grease (GVC)

Lithium complex thickened grease blended with premium ISO-320 synthetic base oil. Fully compounded with additives providing EP protection, oxidation resistance and corrosion protection. Excellent for use in heavy-duty industrial and off-road applications where equipment is working under adverse conditions such as exposure to environmental elements, slow, heavily-loaded applications and shock-loading conditions.

NLGI #2

GVC



ABC



Semi-Synthetic Bar and Chain Oil (ABC)

Clings to metal surfaces better than other oils. Delivers outstanding lubrication and protection.

Synthetic Compressor Oil

Provides outstanding protection and performance in rotary screw, rotary vane, reciprocating and other compressor applications. Compatible with PAO-, ester- and petroleum-based compressor oils. Not compatible with glycol- or silicone-based compressor oils.

Synthetic Compressor Oil (PCH)

ISO 32, SAE 10

Synthetic Compressor Oil (PCJ)

ISO 68, SAE 30

Synthetic Compressor Oil (PCI)

ISO 46, SAE 20

Synthetic Compressor Oil (PCK)

ISO 100, SAE 30/40

SEI



SIROCCO® Synthetic Compressor Oil (SEI)

Provides superior protection and performance in rotary screw and vane compressors. Increases operating efficiency, reducing money spent on energy, repair and maintenance costs. Recommended as a direct replacement for PAG compressor oils such as Sullair Sullube 32 and Ingersol Rand SSR Ultra Coolant. Compatible with PAG-, PAO-, ester- and petroleum-based compressor oils. Not recommended for use with silicone base fluids.

ISO 32/46

PCI



Synthetic Anti-Wear Hydraulic Oil

Protects hard-working hydraulic systems from the stress of high-pressure, high-load and heavy-duty operations. Remains fluid in cold temperatures for immediate cold-weather flow. Special anti-wear additives and rust inhibitors provide optimum protection to expensive equipment. Provides maximum efficiency for reduced fuel usage and increased production.

Synthetic Anti-Wear Hydraulic Oil (AWG) ISO 22

Synthetic Anti-Wear Hydraulic Oil (AWH) ISO 32

Synthetic Anti-Wear Hydraulic Oil (AWI) ISO 46

HVI



Synthetic Multi-Viscosity Hydraulic Oil

Blend of high viscosity index base oils and performance additives provides all-season protection and reliable operation in most types of hydraulic systems. Proven wear resistance and varnish control deliver maximum hydraulic system performance and life. Additionally tailored to promote energy efficiency and foam suppression.

Synthetic Multi-Viscosity Hydraulic Oil (HVG) ISO 22

Synthetic Multi-Viscosity Hydraulic Oil (HVH) ISO 32

Synthetic Multi-Viscosity Hydraulic Oil (HVI) ISO 46

Synthetic Multi-Viscosity Hydraulic Oil (HVJ) ISO 68

AWI



P.i.[®] Performance Improver (API)

P.i. Performance Improver ranks among the most potent gasoline additives available today. As a concentrated detergent, it is outstanding in cleaning combustion chamber deposits, intake valve deposits and fuel injector deposits, eliminating the need for expensive fuel injector cleaning procedures. It is ideal for use prior to emissions inspections, and it helps maintain peak engine efficiency, fuel economy, power and drivability in newer low mileage engines. In engines with accumulated deposits, P.i. provides improved fuel mileage up to 5.7%, reduced emissions, restored power and performance, reduced need for higher octane fuel, reduced carbon rap and preignition, better drivability and smoother operation after only one tank of gasoline. Excellent for both gasoline direct injected (GDI) and port fuel injected engines. Treat one full tank of gas every 4,000 miles (100 hours of service for marine, stationary and off-road gas-powered engines). One bottle treats one full tank of gas up to 20 gallons.




Industry's Most Advanced Formulation Improves Fuel Economy

Intake valve before P.i. treatment.




Intake valve after P.i. treatment.



Injector spray pattern before P.i. treatment.



Injector spray pattern after P.i. treatment.

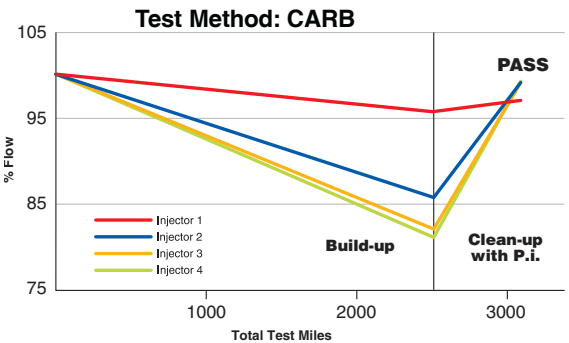

Two of the four dirty injectors tested were fouled >15% and another was fouled >10%. After one tank of operation on AMSOIL P.i., all injectors returned to >95% flow.

Quickshot[®] (AQS)

Formulated to thoroughly clean varnish, gums and insoluble debris in two- and four-stroke gasoline-powered small engines and powersports equipment fuel systems, restoring peak performance. Effectively addresses performance issues related to ethanol, water and dirty pump gas. Stabilizes fuel between uses and during short-term storage periods. See package for treat rates.

Motorcycles • Snowmobiles • Boats • ATVs • Edgers • Tillers • Mowers • Snowblowers • Chainsaws • Generators • Farm & Construction Equipment • and more

Phase separation is when ethanol/water mixtures fall to the bottom of fuel tanks and containers, leading to lean-burn conditions.

Quickshot helps keep water molecules dispersed to prevent phase separation.

Degraded fuel can present a major maintenance issue in motorcycle engines, forming varnish, gum and insoluble debris that clog carburetors, fuel injectors and fuel filters. Carbon buildup can form on the tops of pistons resulting in pre-ignition, rough idling and poor throttle response. Fuel-related problems are only expected to intensify in the coming years as the ethanol content in pump gasoline continues to increase.

AMSOIL Quickshot[®] (AQS) is a premium fuel additive formulated to thoroughly clean and restore peak performance in motorcycle and powersports equipment fuel systems. It also stabilizes fuel between uses and during short-term storage periods.



Addresses Ethanol-Related Performance issues



AST

Gasoline Stabilizer (AST)

Formulated to keep fuel from deteriorating during storage. Reduces the oxidation process to help prevent varnish and gum buildup in gasoline, which can clog injectors, stick floats and cause poor engine performance. Treat rate is one ounce with every 2.5 gallons of fuel. One bottle treats 40 gallons.

Engine Fogging Oil (FOG)

Superior film retention provides stored equipment with long-term protection against corrosion and dry starts, extending engine life and reducing operating expenses. Its aerosol spray formulation offers easy and clean application, while reaching more components and offering complete distribution of the oil, something especially beneficial in applications with horizontal cylinder orientation, such as outboard motors.



FOG

DOMINATOR® Octane Boost (AOB)

Improves the performance of all two-cycle and four-cycle gasoline-fueled engines. Maximizes power, reduces engine knock and improves ignition and engine response. Helps fuel burn cleaner and removes carbon deposits. Excellent as a lead substitute at same treat rates in collector automobiles, older off-road equipment, 4x4 off-road vehicles and gasoline racing vehicles. One bottle treats 15 gallons.

Motorcycle Octane Boost (MOB)

Increases octane up to three numbers for maximum power and efficiency in motorcycles. Designed to improve startup performance and eliminate engine ping or knock for increased power at low-rpm operation. Treat rate is 1.3 oz. per gallon of fuel. One bottle treats four to six gallons.



AOB

Diesel Injector Clean (ADF)

Total system cleaner and lubricity improver for all types of heavy- and light-duty diesel engines, including high-pressure common-rail (HPCR) designs. Outstanding new formula cleans all deposits, including carbon deposits on the nozzle and internal diesel injector deposits (IDID) on the pintle. Formulated with ultra-low-sulfur diesel fuel (ULSD) in mind, it effectively cleans fuel injectors and combustion chamber for improved efficiency and better sealing. Minimizes soot-loading. Improves the oxidation and thermal stability of diesel fuel, improves fuel economy by up to 4.5 percent, restores horsepower and protects against water contamination. Compatible with all types of exhaust emission systems, including diesel particulate filters (DPF). Also recommended in heating oil furnace applications. One ounce treats five gallons of fuel. One 16-oz. bottle treats 80 gallons.

Diesel Cold Flow (ACF)

Recommended for low-temperature applications below 40°F. Effectively modifies wax crystal formation at low temperatures to depress diesel fuel pour point and improve cold-flow filtration properties. Lowers the cold filter plugging point (CFPP) by as much as 34°F and decreases the need for #1 diesel fuel. Contains jet-fuel-type deicer to help prevent ice formation in fuels contaminated with water. Compatible with diesel particulate filters (DPF). Two ounces treat five gallons of fuel. One bottle treats 40 gallons.



ACF

Diesel Injector Clean + Cold Flow (DFC)

Premium, year-round diesel fuel additive that provides improved efficiency and maximum cold-weather performance. Outstanding new formula cleans all deposits, including carbon deposits on the nozzle and internal diesel injector deposits (IDID) on the pintle. Combines the superior detergency and lubricity of AMSOIL Diesel Injector Clean with the excellent anti-gelling properties of AMSOIL Diesel Cold Flow in one convenient package without sacrificing performance. Two ounces treat five gallons of fuel. One bottle treats 40 gallons.

Diesel Cetane Boost (ACB)

Improves combustion efficiency to increase power in diesel engines. Raises cetane number of diesel fuel up to seven points for maximum horsepower. Also improves low-temperature starting, fuel ignition quality and reliability. One ounce treats up to 10 gallons of fuel. One bottle treats up to 160 gallons.

Five-gallon pails and 55-gallon drums are filled to 98 percent of packaging capacity to allow for product expansion in warm temperatures.



ACB

UP TO 4.5%
FUEL ECONOMY IMPROVEMENT



ADF



DFC

Keep a bottle on hand for emergencies



Diesel Recovery (DRC)

Quickly and effectively dissolves the wax crystals that form when diesel fuel surpasses its cloud point. Quickly liquefies gelled diesel fuel, thaws frozen fuel filters and reduces the need for a new filter, saving money and allowing the operator to continue driving with minimal downtime. Performs well in all diesel fuels, including ULSD, off-road and biodiesel. Alcohol-free and non-corrosive. One ounce treats one gallon of fuel. One bottle treats 30 gallons.

Power Foam® (APF)

Removes stubborn carbon deposits, varnish and gum in combustion intake systems. Helps restore startability and engine smoothness, while maximizing fuel economy and horsepower for improved overall engine performance. Especially effective in powersports, small-engine and carbureted-vehicle applications.



NEW!

Heavy-Duty Degreaser (ADG)

Formulated with powerful and fast-acting solvents, attacking petroleum-based grime on a molecular level to loosen its hold on metal, concrete, engines and other surfaces. Active d'limonene (citrus) formula makes cleaning easy and leaves a clean scent.

Silicone Spray (ALS)

Effectively lubricates and protects rubber, nylon, plastics, upholstery, vinyl, wood, cardboard, fiberglass and other nonmetal surfaces with a dry lubricating film. Helps prevent the cracking and drying of rubber, locks-out moisture and will not attract dust or dirt. Special nonstaining formula is excellent for waterproofing and protecting leather boots, shoes, jackets, suede and more.



Metal Protector (AMP)

Disperses water and protects metal surfaces from rust and corrosion. Penetrates existing rust build-up and loosens bolts. Also dries wet electrical systems. A must for any home or shop. Keep a can in your vehicle too.



Hundreds of household uses

Heavy Duty Metal Protector (AMH)

A heavy-duty spray lubricant fortified with special rust and corrosion inhibitors. Penetrates and adheres to metal surfaces, leaving a dry, long lasting wax-like protective coating. Dries completely and doesn't attract dust. Works well as an undercoat, preventing rust and eliminating squeaks.



Engine and Transmission Flush (FLSH)

Helps restore operating efficiency, increase fuel economy and reduce emissions in gasoline and diesel engines and automatic transmissions. Its potent, detergent-based formula dissolves and disperses sludge, varnish and deposits, promoting lower operating temperatures and reduced oil consumption. More environmentally friendly than solvent-based products, providing safer cleaning action and easy disposal with waste oil.



Propylene Glycol Antifreeze and Engine Coolant (ANT)

Combines the benefits of biodegradability, low toxicity and all-climate protection. AMSOIL Propylene Glycol Antifreeze and Engine Coolant is less toxic than ethylene glycol coolants. Offers protection for 750,000 miles/7 years for over-the-road diesel trucks and 250,000 miles/7 years for gasoline vehicles. Compatible with all other major antifreeze products.



Dominator® Coolant Boost (RDCB)

Provides quick and effective heat transfer inside radiator and cylinder heads, resulting in reduced operating temperatures, more efficient operation, increased horsepower and quicker engine warm-up times. Robust mixture of corrosion inhibitors effectively protect the radiator, heater core, water pump, cylinder heads, engine block and intake manifold from the damaging effects of corrosion. Recommended with both racing applications using straight water coolant and automotive applications using 50/50 coolant/water mixtures.





High Performance Brake Fluid

Provides superior performance in auto/light truck, high-performance, racing and powersports applications. Maintains stable viscosity over a wide temperature range. Superior additive package raises boiling point. Water is kept in suspension, slowing its effects on braking systems. High boiling temperature ensures maximum life and reliable braking power in extreme conditions.

Series 500 High Performance DOT 3 Brake Fluid (BF3)

FMVSS 116 • SAE J1703 • ISO 4925 • Federal Specification V V-B-680

Series 600 High Performance DOT 4 Brake Fluid (BF4)

FMVSS 116 • SAE J1704 • ISO 4925 • Federal Specification V V-B-680

Multi-Vehicle Synthetic Power Steering Fluid (PSF)

Effectively reduces friction and delivers excellent wear protection and lubricity, resulting in cooler operating temperatures, longer component life and quieter operation. Low pour point ensures immediate lubrication at startup and in cold temperatures, while high viscosity index resists thermal breakdown and maintains maximum protection in high temperatures.

AMSOIL Synthetic Multi-Vehicle Power Steering Fluid meets or exceeds application requirements for use in BMW, Chrysler, Ford, GM/Saginaw, Hyundai/Kia, Mercedes-Benz, Mitsubishi, Navistar, Nissan, Porsche, Saab, Subaru, Toyota, Volvo and VW/Audi vehicles.



Fluid Extraction Pump (G2576)

Aids in the removal of power steering fluid, engine oil, drivetrain lubricants and engine coolant. Can also be used to install fresh lubricants in hard-to-reach areas.



Miracle Wash® Waterless Wash & Wax (AMW)

A unique dry car wash and polish delivers outstanding performance and quick, easy and economical application. No water required. Specially formulated surfactants lift dirt and other particles from the surface and hold them in suspension. Miracle Wash then acts as a shield, protecting the surface from abrasion while you wipe the dirt clean. Repels dust and light dirt particles and protects against the sun's ultraviolet rays.



Aftermarket Partners

AMSOIL also offers premium products from its aftermarket partners, including Donaldson, WIX and MANN filters; NGK spark plugs and wires; TRICO wiper blades and Mothers® appearance products.

For product and pricing information, call 1-800-956-5695 (Monday - Friday, 7 a.m. - 5 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed).



Contact your local full-service AMSOIL Dealer for more information on AMSOIL products or to place an order. You may also order direct by calling AMSOIL INC. at 1-800-956-5695 and providing the referral number listed here. ▼

Referral # _____